





- Features:**
- * Available in 2 thru 24 circuit housings
 - * Voltage rating 600V (R.M.S.)
 - * Current rating 9 Amps per circuit

Specification:
Material:
 * UL 94V-2 nylon 66

Electrical:
 * Voltage rating 600V AC/DC
 * Current rating 9A max
 * Withstanding Voltage: 1500V AC for 60 seconds
 * Insulation Resistance: 1000M ohms min
 * Temperature Rise: 30°C max
 * Storage Temperature Range: -40°C to 105°C

Dimensional Information -in. (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		.221 (5.6)	14	.992 (25.2)	1.213 (30.8)
4	.165 (4.2)	.386 (9.8)	16	1.157 (29.4)	1.378 (35.0)
6	.331 (8.4)	.551 (14.0)	18	1.323 (33.6)	1.543 (39.2)
8	.496 (12.6)	.717 (18.2)	20	1.488 (37.8)	1.709 (44.1)
10	.661 (16.8)	.892 (22.7)	22	1.654 (42.0)	1.874 (47.6)
12	.827 (21.0)	1.047 (26.6)	24	1.819 (46.2)	2.039 (51.8)

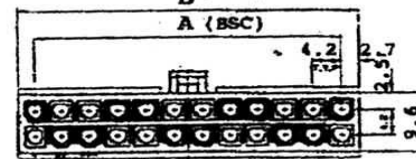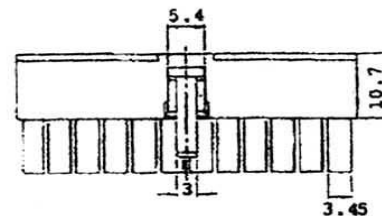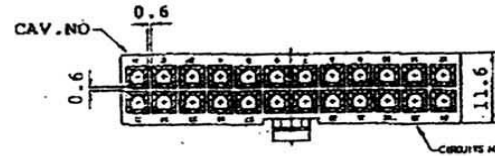

UNIT: mm

				UNIT		SCALE		PART NAME	
				MM				4.2mm MINI FIT HOUSING (MALE)	
制表日: 2005/04/21		DRAWING.	APPROVED	APPD.	CKD.	TOLERANCE	PART NO.	REV.	
		<i>Kevin</i>				± 0.5		A	