

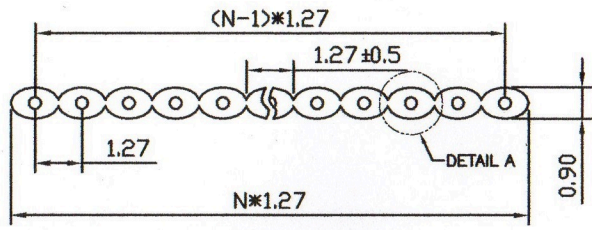


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 15/06/05		

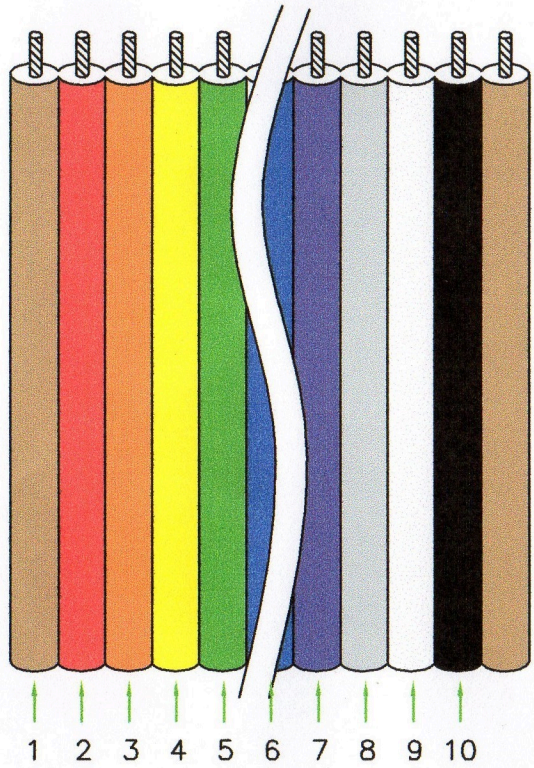

N=Positions




1 2 3 4 5 6 7 8 9 10

NOTES:

- Color  
.Insulation: MULTI COLOUR
- SPECIFICATION  
. Rating: 300V 1A  
. Conductor Size: 28AWG  
. Insulation resistance: 100MΩ/km min.  
. Dielectric withstanding voltage: 1000 VAC 1 minute.  
. Temperature range: -20°C to +80°C.
- APPLICATION  
. Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code

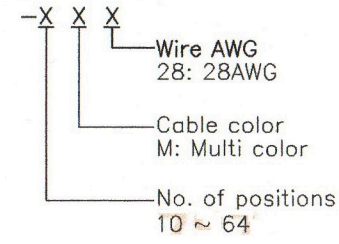

Pin	Cable color	Pin	Cable color
1	Brown	6	Blue
2	Red	7	Purple
3	Orange	8	Gray
4	Yellow	9	White
5	Green	10	Black

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	FLAT CABLE MUTLI COLOR
X. ±0.60 .X ±0.38 .XX ±0.25	X. ±5° .X ±3° .XX ±2°	UNITS	mm	SHEET SIZE	
DRAWING TYPE	CUSTOMER	COLxx			
SCALE	1:1 SHEET 1 OF 1				
DRAWING NO.					