

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

SPECIFICATION

MATERIAL

Housing:PBT+5%PC UL94V-0

Contacts:PhosPhor Bronze

ELECTRICAL


Current rating: 2 Amps .

Contact resistance: 20 mohms initial

Insulation resistance: 100000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

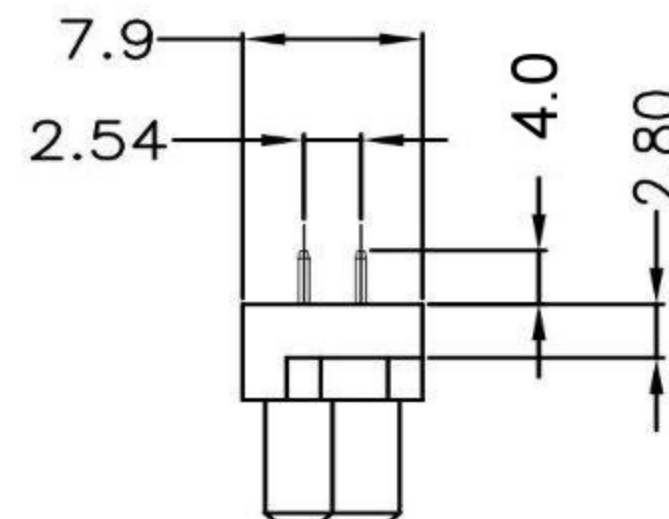

RoHS
Compliant

APPD. 核准	 SCALE 比例 参考	TOLERANCE	PART NAME DIN41612 2.54mm DIP TYPE 180° DUAL ROW BODY 32P SIZE-A+B 32P FEMALE SELECTIVE GOLD PLATING L=4.0mm ROHS														
DWG. 製圖		<table border="1"> <tr> <td>X.</td> <td>±0.25</td> <td>X'</td> <td>±5'</td> </tr> <tr> <td>.X</td> <td>±0.20</td> <td>.X'</td> <td>±2'</td> </tr> <tr> <td>.XX</td> <td>±0.15</td> <td>.XX'</td> <td>±1'</td> </tr> <tr> <td>.XXX</td> <td>±0.02</td> <td>.XXX'</td> <td>±0.5'</td> </tr> </table>		X.	±0.25	X'	±5'	.X	±0.20	.X'	±2'	.XX	±0.15	.XX'	±1'	.XXX	±0.02
X.	±0.25	X'	±5'														
.X	±0.20	.X'	±2'														
.XX	±0.15	.XX'	±1'														
.XXX	±0.02	.XXX'	±0.5'														
DATE 制表日 2012/08/15	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. EH32														
PAGE 張數 1 OF 1	REV. 版本 A																