



Model No.	SLQCxx5050
REV.	C5

## PRODUCT SPECIFICATION FOR LED Ribbon Light

### Descriptions:

- Linear separable LED strip on flexible printed circuit board with self-adhesive back
- Long life, easy installation
- Voltages available 12VDC
- LED Type: SMD LED, 5.0x5.0mm, 120deg.

### Features:

- Available in red, orange, yellow, green, blue, white, etc
- Directly use on line voltage
- Low power consumption, high intensity
- Energy saving
- Excellent beam control
- Long life

### Application:

- Channel letter signs
- Indirect accent décor light
- Large area back lighting
- Under counter light
- Decorate building's contour
- Substitute neon light

### Product Picture:



LED & Application Technologies





Model No.	SLQCxx5050
REV.	C5

### Device Selection Guide

Module No.	Color	Dom. Wavelength (Typ.)	Intensity / Per LED (Typ.)
SLQCR5050	Red	625±5nm	1120 mcd
SLQCN5050	Orange	605±5nm	1120 mcd
SLQCAM5050	Yellow	590±5nm	1120 mcd
SLQCV5050	Green	525±5nm	3000 mcd
SLQCAZ5050	Blue	470±5nm	1560 mcd
SLQCB5050	White	X=0.27 ; Y=0.28	7000 mcd
SLQCBC5050	Warm White	X=0.45 ; Y=0.41	5000 mcd
SLQCP5050	Pink	X=0.45 ; Y=0.17	1900 mcd

### Absolute Maximum Ratings(Ta=25°C)

Items	Symbol	Values	Units
Operating Supply Range(DC)	V <sub>dc</sub>	14	V
Input Current (DC)	I <sub>i</sub>	1.8	A
Power Dissipation	P <sub>a</sub>	25.2	W
LED Light Source Temperature	T <sub>led</sub>	105	DegC
Operating Temperature	T <sub>ope</sub>	-10 ~ +40	DegC
Storage Temperature	T <sub>sto</sub>	-20 ~ +80	DegC

### Typical Performance (Ta=25°C)


Items	Symbol	Min.	Typ.	Max.	Units
LED Module Power	P <sub>m</sub>	-	14.4	25.2	w
Input Voltage(DC)	V <sub>i</sub>	-	12	14	V
Product Input Current	I <sub>f</sub>	-	1.2	1.8	A
Beam Pattern	BP	-	120	-	Deg
Total Length of Modules (Including Pin)	L <sub>mod.</sub>	-	1000	-	mm
LED Quantity of Every Meter	OTY	-	60	-	PCS
Net Weight	Wei.	---	16	---	g

LED & Application Technologies



Model No.	SLQCxx5050
REV.	C5

**Product Dimensions:**

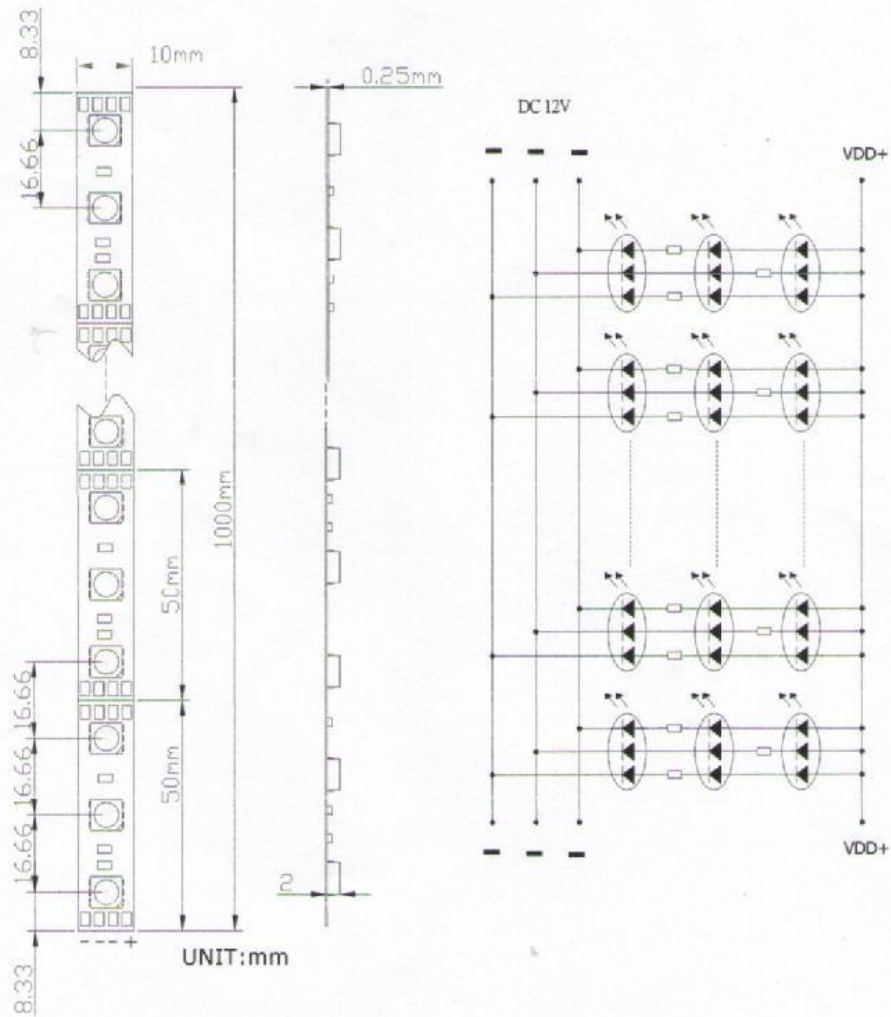

LED & Application Technologies

